


# TYPE 48VBF

## ELASTOMER O-RING SEAL FOR HOT WATER

Technical Specification

- A – Face/Primary Ring
- B – Seat/Mating Ring
- C – Spring
- D – Dynamic O-ring
- E – Retainer
- F – Disc
- G – Anti-X Ring
- H – Sleeve

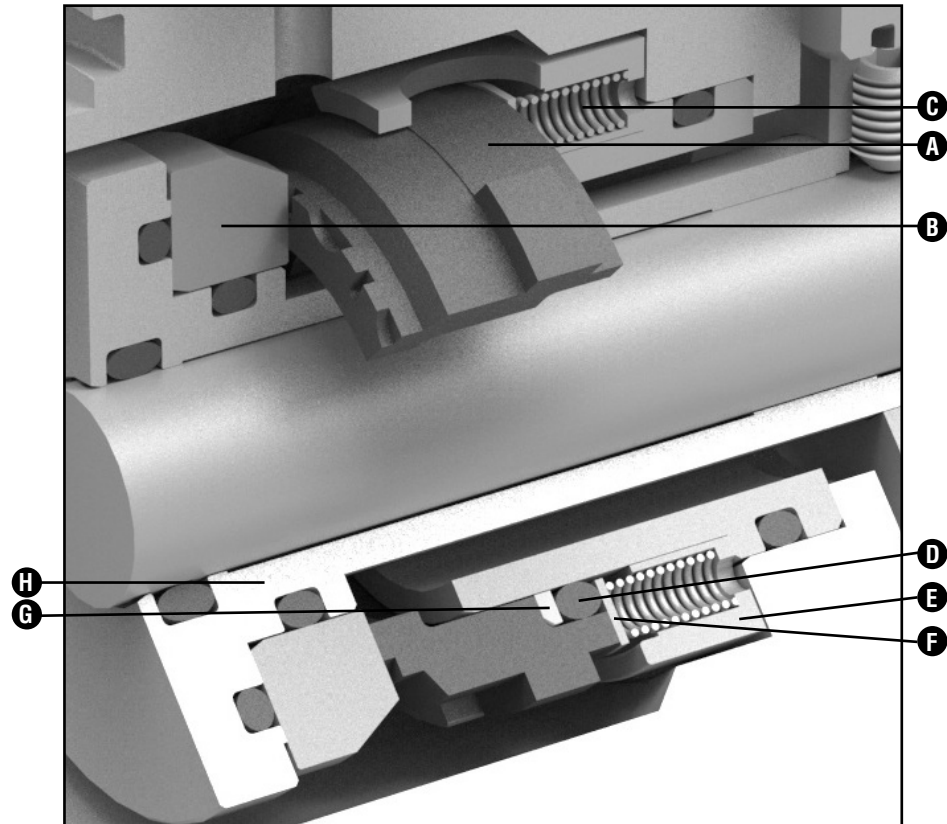

### Product Description

The 48VBF seal is a single cartridge, stationary head, O-ring pusher seal that can operate without an external heat exchanger (API Plan 23) in critical high temperature, medium pressure pumps. This is ideal for application in Boiler Feed pumps, which inject feedwater (hot, demineralized, deaerated water) into the boiler at fossil-fuel steam power plants or within the on-site generation plant of a processing or manufacturing site.

The main risk of seal failure is due to numerous problems associated with the heat exchanger seal support loop, resulting in the BFW pump shutting down and the boiler going offline. Common heat exchanger support loop problems include:

- Loss of cooling water
- Undersized heat exchanger
- Incorrectly installed/located heat exchanger and/or piping
- Poor/inadequate venting procedure after outages/shutdowns
- Scale/corrosion build-up within the piping, limiting flow and seal cooling

By allowing operation without that heat exchanger, the 48VBF reduces cost to the end-user for the heat exchanger, piping and water usage.

### Performance Capabilities

- Temperature: 0°C to 200°C/32°F to 392 °F
- Pressures: Carbon Face: Up to 30 bar g/435 psi g
- Speed: Up to 30 m/s/5900 fpm

### Design Features

Primary ring– high duty carbon-graphite grade for tolerance to difficult sealing conditions found in hot water services.

Unique design - proprietary patent pending hydrodynamic features to allow sealing hot water far above its atmospheric boiling point while minimizing leakage. Allows operation on hot water without cooling.

Rotating mating ring design - enhances cooling and permits use at higher shaft speeds, often required in power plants.

Compatible - Fits API seal chambers, and interchangeable with existing John Crane seals on similar applications.

Easy upgrade - Existing commonly used 48V seal may be upgraded to 48VBF by simple change of primary ring

Robust drive mechanism - The primary ring incorporates an optimized ear drive design for increased torque capability



# TYPE 48VBF

## ELASTOMER O-RING SEAL FOR HOT WATER


### Type 48VBF Dimensional Data (inches)

Seal Size	Size Code	D Max. Shaft Size	D2	D4	D24	D26	D27	L22	L23	L30	L31	L39	L55	L91	Stud Size
2.750	<b>0698</b>	2.000	2.750	3.874	3.626	7.008	5.591	0.437	3.508	0.630	2.988	4.142	4.575	4.260	5/8"-11UNC
2.875	<b>0730</b>	2.125	2.875	4.000	3.752	7.126	5.709	0.437	3.508	0.630	2.988	4.142	4.575	4.260	5/8"-11UNC
3.000	<b>0762</b>	2.250	3.000	4.126	3.874	7.283	5.866	0.437	3.508	0.630	2.988	4.142	4.575	4.260	5/8"-11UNC
3.125	<b>0793</b>	2.375	3.125	4.374	4.126	7.520	6.102	0.559	3.508	0.630	2.988	4.142	4.701	4.260	5/8"-11UNC
3.250	<b>0825</b>	2.500	3.250	4.500	4.252	7.638	6.220	0.559	3.508	0.630	2.988	4.142	4.701	4.260	5/8"-11UNC
3.375	<b>0857</b>	2.625	3.375	4.626	4.374	7.756	6.339	0.559	3.508	0.630	2.988	4.142	4.701	4.260	5/8"-11UNC
3.500	<b>0889</b>	2.750	3.500	4.752	4.500	7.874	6.457	0.559	3.508	0.630	2.988	4.142	4.701	4.260	5/8"-11UNC
3.625	<b>0920</b>	2.875	3.625	4.874	4.626	8.031	6.614	0.563	3.693	0.630	3.173	4.327	4.890	4.445	5/8"-11UNC
3.750	<b>0952</b>	3.000	3.750	5.000	4.752	8.150	6.732	0.563	3.693	0.630	3.173	4.327	4.890	4.445	5/8"-11UNC
3.875	<b>0984</b>	3.125	3.875	5.126	4.874	8.268	6.850	0.563	3.693	0.630	3.173	4.327	4.890	4.445	5/8"-11UNC
4.000	<b>1016</b>	3.250	4.000	5.252	5.000	8.386	6.969	0.563	3.693	0.630	3.173	4.327	4.890	4.445	5/8"-11UNC
4.125	<b>1047</b>	3.375	4.125	5.374	5.126	8.976	7.244	0.563	3.693	0.630	3.173	4.327	4.890	4.445	3/4"-10UNC
4.250	<b>1079</b>	3.500	4.250	5.500	5.252	9.213	7.480	0.563	3.693	0.630	3.173	4.327	4.890	4.445	3/4"-10UNC
4.375	<b>1111</b>	3.625	4.375	5.626	5.374	9.370	7.638	0.563	3.693	0.630	3.173	4.445	5.008	4.563	3/4"-10UNC
4.500	<b>1143</b>	3.750	4.500	5.752	5.500	9.488	7.756	0.563	3.693	0.630	3.173	4.445	5.008	4.563	3/4"-10UNC
4.625	<b>1174</b>	3.875	4.625	5.937	5.685	9.606	7.874	0.685	3.697	0.630	3.177	4.449	5.134	4.567	3/4"-10UNC
4.750	<b>1206</b>	4.000	4.750	6.063	5.811	9.724	7.992	0.685	3.697	0.630	3.177	4.449	5.134	4.567	3/4"-10UNC
4.875	<b>1238</b>	4.125	4.875	6.185	5.937	9.882	8.150	0.685	3.697	0.630	3.177	4.449	5.134	4.567	3/4"-10UNC
5.000	<b>1270</b>	4.250	5.000	6.311	6.063	9.961	8.228	0.685	3.697	0.630	3.177	4.449	5.134	4.567	3/4"-10UNC
5.125	<b>1301</b>	4.375	5.125	6.437	6.185	10.118	8.386	0.685	3.697	0.630	3.177	4.449	5.134	4.567	3/4"-10UNC
5.250	<b>1333</b>	4.500	5.250	6.563	6.311	10.236	8.504	0.681	4.012	0.630	3.492	4.764	5.445	4.882	3/4"-10UNC
5.375	<b>1365</b>	4.625	5.375	6.685	6.437	10.354	8.622	0.681	4.012	0.630	3.492	4.764	5.445	4.882	3/4"-10UNC
5.500	<b>1397</b>	4.750	5.500	6.811	6.563	10.472	8.740	0.681	4.012	0.630	3.492	4.764	5.445	4.882	3/4"-10UNC
5.625	<b>1428</b>	4.875	5.625	6.937	6.685	10.630	8.898	0.681	4.012	0.630	3.492	4.764	5.445	4.882	3/4"-10UNC
5.750	<b>1460</b>	5.000	5.750	7.063	6.811	10.709	8.976	0.681	4.012	0.630	3.492	4.764	5.445	4.882	3/4"-10UNC
5.875	<b>1492</b>	5.125	5.875	7.185	6.937	10.866	9.134	0.681	4.012	0.630	3.492	4.764	5.445	4.882	3/4"-10UNC
6.000	<b>1524</b>	5.250	6.000	7.311	7.063	11.339	9.606	0.681	4.012	0.630	3.492	4.764	5.445	4.882	3/4"-10UNC
6.250	<b>1587</b>	5.500	6.250	7.628	7.312	11.575	9.843	0.693	4.059	0.630	3.543	4.969	5.665	5.087	3/4"-10UNC
6.500	<b>1651</b>	5.750	6.500	7.878	7.562	11.811	10.079	0.693	4.059	0.630	3.543	4.969	5.665	5.087	3/4"-10UNC
6.750	<b>1714</b>	6.000	6.750	8.128	7.812	12.047	10.315	0.693	4.059	0.630	3.543	4.969	5.665	5.087	3/4"-10UNC
7.000	<b>1778</b>	6.250	7.000	8.378	8.062	12.283	10.551	0.693	4.059	0.630	3.543	4.969	5.665	5.087	3/4"-10UNC
7.250	<b>1841</b>	6.500	7.250	8.628	8.312	12.520	10.787	0.693	4.059	0.630	3.543	4.969	5.665	5.087	3/4"-10UNC
7.500	<b>1905</b>	6.750	7.500	8.878	8.562	12.756	11.024	0.693	4.059	0.630	3.543	4.969	5.665	5.087	3/4"-10UNC
7.750	<b>1968</b>	7.000	7.750	9.128	8.875	12.992	11.260	0.760	4.311	0.630	3.791	5.220	5.976	5.339	3/4"-10UNC


# TYPE 48VBF

## ELASTOMER O-RING SEAL FOR HOT WATER

### Type 48VBF Speed Rating

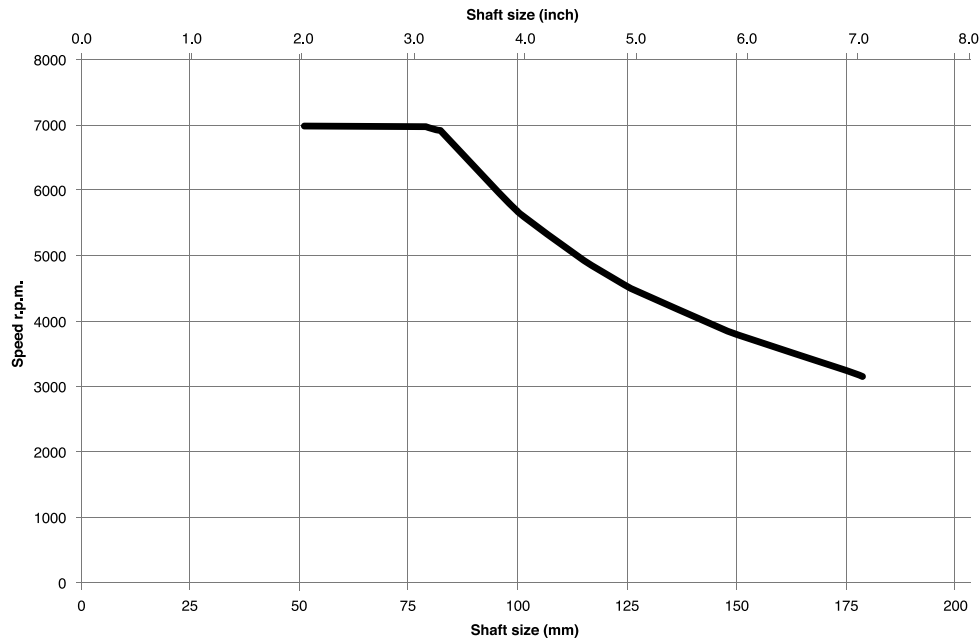

### Type 48VBF Pressure Rating

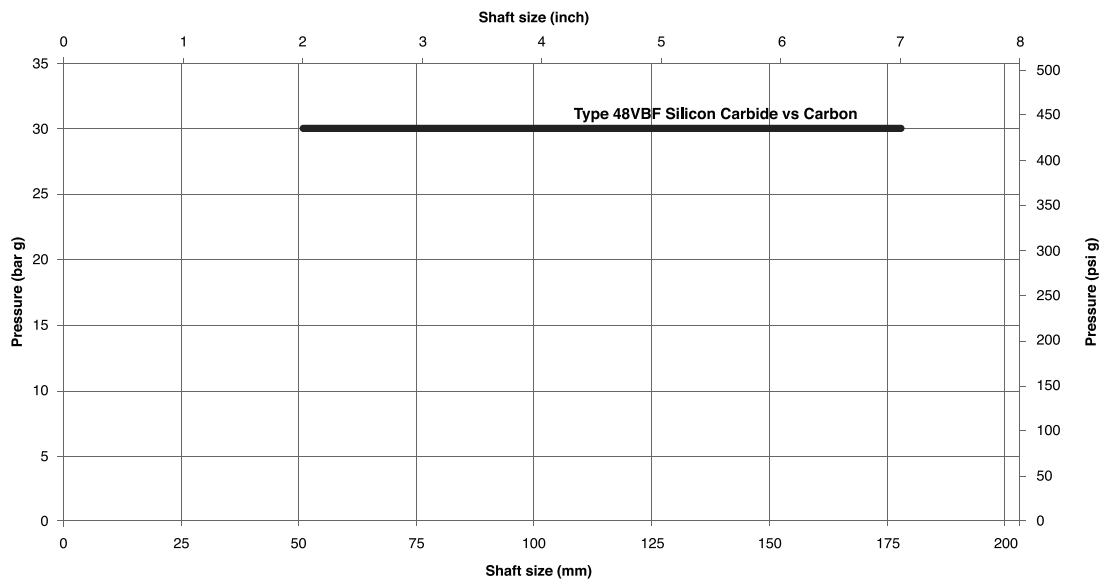

**North America**  
 United States of America  
 Tel: 1-847-967-2400  
 Fax: 1-847-967-3915

**Europe**  
 United Kingdom  
 Tel: 44-1753-224000  
 Fax: 44-1753-224224

**Latin America**  
 Brazil  
 Tel: 55-11-3371-2500  
 Fax: 55-11-3371-2599

**Middle East & Africa**  
 United Arab Emirates  
 Tel: 971-481-27800  
 Fax: 971-488-62830

**Asia Pacific**  
 Singapore  
 Tel: 65-6518-1800  
 Fax: 65-6518-1803

If the products featured will be used in a potentially dangerous and/or hazardous process, your John Crane representative should be consulted prior to their selection and use. In the interest of continuous development, John Crane Companies reserve the right to alter designs and specifications without prior notice. It is dangerous to smoke while handling products made from PTFE. Old and new PTFE products must not be incinerated. ISO 9001 and ISO 14001 Certified, details available on request.