



### Product Description

John Crane Style 2160 and Style 4160 sheet gasketing are general purpose materials that have excellent chemical resistance. The unique properties of these materials help to deliver excellent performance and sealability in severe industrial applications including alkalis, organic acids, and marine engines

### Construction/Features


Style 2160 sheet gasket is a compressed sheet with a synthetic fiber base and butadiene acrylonitrile binder. This material has excellent sealability and exhibits good creep resistance. The material is rated for temperatures ranging from -40 to 750 degrees Fahrenheit at pressures of up to 102 bar/1400 psi.

Style 4160 sheet gasket is a compressed sheet with synthetic fiber base and styrene butadiene rubber binder. This material has excellent sealability, good anti-stick properties, and exhibits good creep resistance. The material is rated for temperatures ranging from -25 to 750 degrees Fahrenheit at pressures of up to 68 bar/1200 psi.

These two gasket styles provide maximum safety and high torque retention. Overall cost savings can be realized by:

- Reduction of inventory (standard gasket for many applications)
- Reduction of gasket leaks (product loss)
- Reduction of maintenance

### 2160 Temperature vs. Pressure

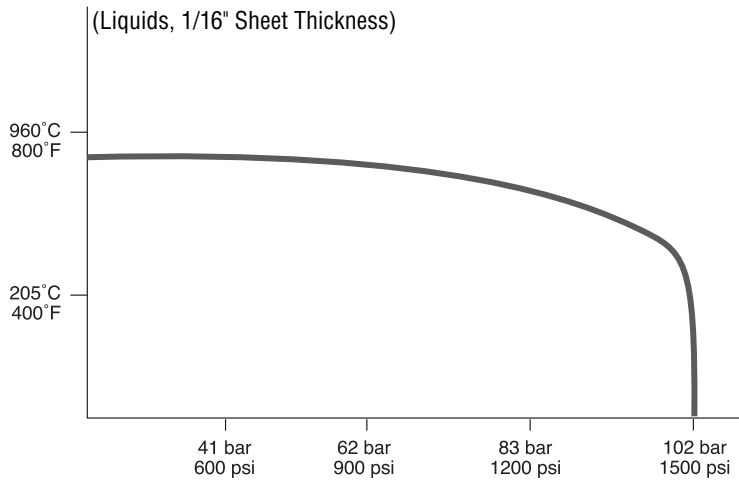


### Properties 2160

Properties are based on a 1/16" sheet.

- Color: Off-white
- Density: 112 lb/ft<sup>3</sup>
- ASTM F36A: 7-17%/50% (Compressibility/Recovery)
- ASTM F37A: 0.25 mL/hour (Sealability: .58 gal/yr)
- ASTM F38B: 20% (Creep Relaxation)
- Cross Grain  
Tensile Strength: 138 bar/2000 psi

### 4160 Temperature vs. Pressure

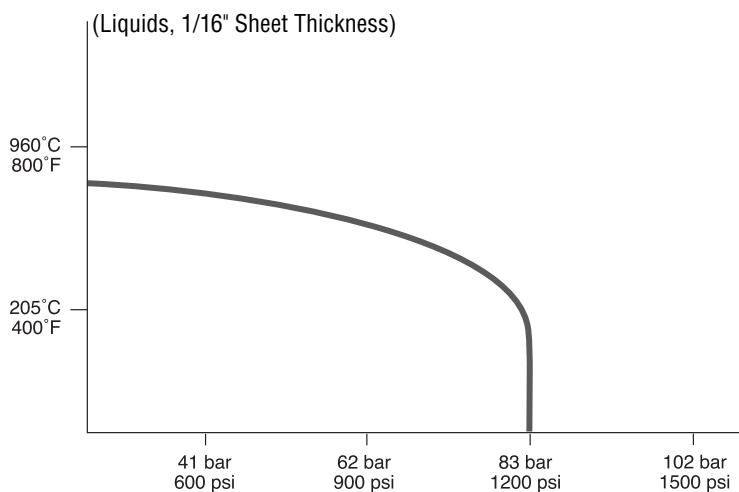

### Properties 4160

Properties are based on a 1/16" sheet.

- Color: Off-white
- Density: 112 lb/ft<sup>3</sup>
- ASTM F36A: 7-17%/50% (Compressibility/Recovery)
- ASTM F37A: 0.20 mL/hour (Sealability: .46 gal/yr)
- ASTM F38B: 20% (Creep Relaxation)
- Cross Grain  
Tensile Strength: 109 bar/1600 psi



**North America**  
United States of America  
Tel: 1-847-967-2400  
Fax: 1-847-967-3915

**Europe**  
United Kingdom  
Tel: 44-1753-224000  
Fax: 44-1753-224224

**Latin America**  
Brazil  
Tel: 55-11-3371-2500  
Fax: 55-11-3371-2599

**Middle East & Africa**  
United Arab Emirates  
Tel: 971-481-27800  
Fax: 971-488-62830

**Asia Pacific**  
Singapore  
Tel: 65-6518-1800  
Fax: 65-6518-1803

If the products featured will be used in a potentially dangerous and/or hazardous process, your John Crane representative should be consulted prior to their selection and use. In the interest of continuous development, John Crane Companies reserve the right to alter designs and specifications without prior notice. It is dangerous to smoke while handling products made from PTFE. Old and new PTFE products must not be incinerated. ISO 9001 and ISO14001 Certified, details available on request.